



HEAVYPRO




Caratteristiche Generali

- Struttura robusta con cofano in acciaio inox
- Pompa a 3 pistoni in ceramica con sistema biella-manovella
- Valvola di by-pass automatica con azzeramento della pressione nella testa della pompa
- Arresto per microperdite
- Arresto dopo 1 ora di Total Stop
- Arresto per mancanza d'acqua
- Arresto per surriscaldamento motore
- Segnalazione d'errore tramite spia intermittente
- Motore elettrico trifase
- Regolazione pressione
- Flangia e giunto elastico
- Avviamento stella-triangolo (AST)
- Lunghezza cavo elettrico 5 m


General Features

- Heavy-duty frame with stainless steel cover
- Triplex pump with ceramic pistons and connecting rod system
- Automatic by-pass valve with pump head pressure discharge
- Stop for leak detention
- Stop after 1 hour of total stop
- Stop for lack of water
- Stop for motor overloading
- System error warning light
- Heavy-duty three-phase motor
- Pressure adjustment
- Flange and flexible coupling
- Star-delta starting (AST)
- Electric cable length 5 m

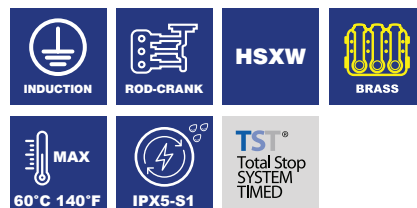

MOD	COD	MAX	MAX							KG NET
		bar	psi	l/h	gph	kW	rpm	Hz	V	kg
1125	22375	350	5100	1260	333	17	1450	50	400 3~	250

Accessori standard Standard accessories

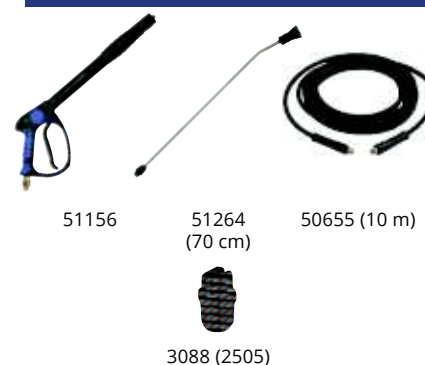



11 Series 1130

IDROPULTRICI ALTA PRESSIONE
high pressure washers

HEAVYPRO



Caratteristiche Generali

- Struttura robusta con cofano in acciaio inox
- Pompa a 3 pistoni in ceramica con sistema biella-manovella
- Valvola di by-pass automatica con azzeramento della pressione nella testa della pompa, solo by-pass
- Motore elettrico trifase
- Regolazione pressione
- Giunto elastico con protezione
- Avviamento stella-triangolo (AST)
- Vaschetta acqua inox
- Lunghezza cavo elettrico 5 m

General Features

- Heavy-duty frame with stainless steel cover
- Triplex pump with ceramic pistons and connecting rod system
- Automatic by-pass valve with pump head pressure discharge, by-pass only
- Heavy-duty three-phase motor
- Pressure adjustment
- Flexible joint with guard
- Star-delta starting (AST)
- Stainless steel water tank
- Electric cable length 5 m



MOD	COD	MAX	MAX						NET	
		bar	psi	l/h	gph	kW	rpm	Hz	V	kg
1130	22376	500	7250	1320	348	26	1450	50	400 3~	280

Accessori standard Standard accessories

