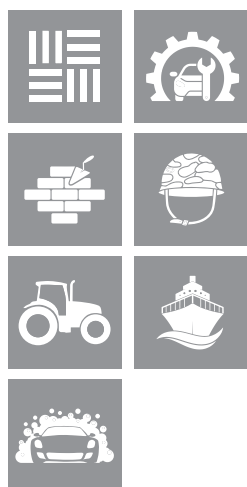


1450 RPM INDUSTRIAL USE

**Caratteristiche Generali**

- Robusto telaio su struttura portante in acciaio
- Pompa a 3 pistoni in ceramica
- Testa pompa in ottone
- Motore elettrico con protezione termica
- Regolazione pressione
- Serbatoio detergente incorporato
- Aspirazione detergente
- Termostato
- Pressostato di sicurezza in caso mancanza acqua
- Caldaia verticale di produzione interna
- Serbatoio gasolio 15 lt
- Spia mancanza gasolio
- Spia tensione rete

General Features

- Robust structure on painted steel base
- 3 pistons pump
- Pump head in pressed brass
- Heavy-duty motor with thermal protection
- Pressure regulation valve
- Built-in detergent tank
- Detergent suction
- Thermostat
- Safety pressure switch to stop boiler if lack of water
- Vertical boiler produced in our factory
- Fuel tank 15 lt
- Fuel warning light
- Voltage warning light

**NEW
COMPACT**

120/10	120 bar	600 l/h	0-140°	1450rpm	230 V - 50 Hz	3 HP	15 lt	114 kg
150/15	150 bar	900 l/h	0-140°	1450rpm	400 V - 50 Hz	5,5 HP	15 lt	118 kg
170/13	170 bar	780 l/h	0-140°	1450rpm	400 V - 50 Hz	5,5 HP	15 lt	118 kg
200/15	200 bar	900 l/h	0-140°	1450rpm	400 V - 50 Hz	7,5 HP	15 lt	125 kg

Dotazione di serie

- Tubo alta pressione 10 mt
- Pistola e lancia
- Ugello alta pressione

Standard equipment

- High pressure hose 10 mt
- Gun and Lance
- High Pressure Nozzle

Optional - On request

Ant. Magnetico
Magnetic scale preventing device



Ugello Sturatubi
Pipe jet



Sabbiatore
Sandblaster



Ugello Rotante
Rotary jet nozzle



Doppia Lancia
Double lance



Avvolgitubo
Hose reel